


UNDERHOOD™ 40

AIR COMPRESSORS

TRUCK SERIES AIR COMPRESSOR

THE LIGHTEST WEIGHT MOBILE AIR COMPRESSOR AVAILABLE.

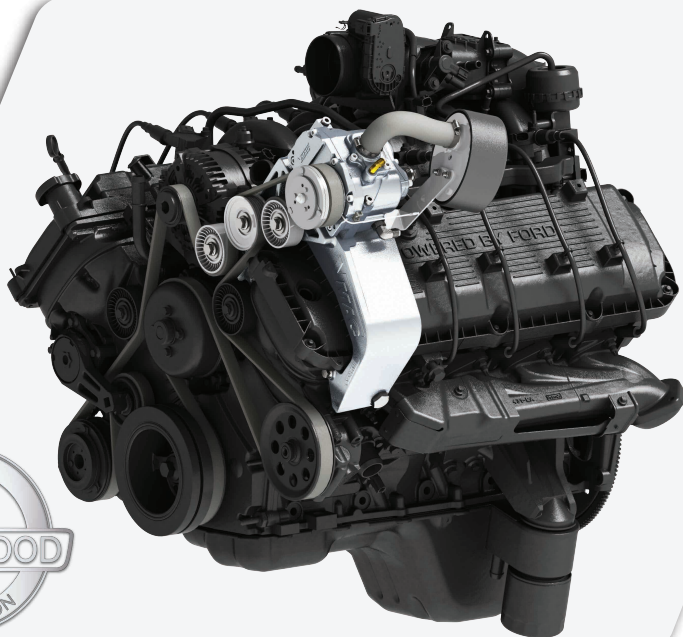

"Before we got the UNDERHOOD™ Air Compressor, we used a truck-mounted gas powered air compressor. I like that we don't have to worry anymore about having gas for a separate engine, or taking up space in the back of our truck. With the UNDERHOOD™, you just push the button to start, and get continuous air right away, even in the colder winter months."

- Derrick Moore, Evans Landscaping,
Cincinnati Ohio

UP TO 40 CFM. 100% OF THE TIME.

UNDERHOOD™ 40 Truck Series air compressors use VMAC's patented rotary screw technology, designed to maintain 100% of the required tool CFM, so operators don't have to wait for their air compressor to fill an air receiver tank. This maximizes air tool performance and eliminates downtime.

DECREASE TRUCK GVW BY UP TO 290 LB


UNDERHOOD™ 40 Truck Series air compressors reduce truck GVW by as much as 290 lb. Choosing a lightweight air compressor means you'll be able to add more tools and equipment to your truck, carry more materials, or take advantage of better fuel economy.

FREE UP TO 23 FT³ ON YOUR TRUCK DECK

UNDERHOOD™ 40 Truck Series air compressors free up to 23 cubic feet on the truck deck or cargo area because the air compressor mounts in the engine compartment. The only space required on the truck deck or cargo area is 1.7 cubic feet for a combined air/oil cooler and air/oil separator tank.



DESIGNED FOR:

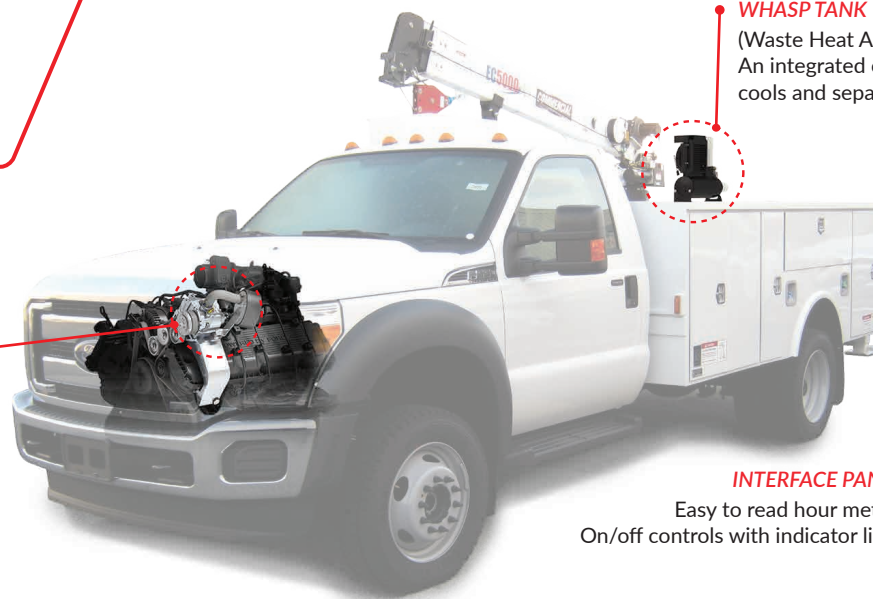

UNDERHOOD™ AIR COMPRESSOR

Oil-injected rotary screw;
up to 40 CFM* @ 100 psi;
100% duty cycle; up to 150 psi

WHASP TANK

(Waste Heat Air Separation Package)
An integrated cooler/tank that both
cools and separates the air/oil mixture

INTERFACE PANEL

Easy to read hour meter;
On/off controls with indicator light



SPECIFICATIONS

Air Compressor Output	Up to 40 CFM* @ 100 psi (150 psi max)
Air Compressor Type	Belt-driven, 100% duty cycle, VMAC oil-injected rotary screw
Weight (wet)	Approximately 62 lb (28 kg)
WHASP Tank	<ul style="list-style-type: none"> ➤ Combined air/oil cooler, air/oil separator tank ➤ 19.75" (l) x 8" (w) x 17.5" (h) / 44.5 cm (l) x 20.3 cm (w) x 50.2 cm (h)
Throttle Control	Two-speed operation; digital throttle control connects to OBD2 CAN bus connector**, automatically modulates engine RPM depending on air usage; high idle adjustment
Interface Panel	<ul style="list-style-type: none"> ➤ Easy to read hour meter ➤ On/Off controls with indicator light
Safety System	<ul style="list-style-type: none"> ➤ Electro-Magnetic Clutch ➤ Automatic rapid blow-down valve on tank ➤ Compressor thermal protection circuit ➤ 200 psi air pressure relief valve
Air Receiver Tanks	Minimum 6-gallon air receiver tank required for best performance
Warranty	Two years on all major components; VMAC air-ends are covered by VMAC's Lifetime Limited Warranty



*Actual maximum CFM output of the air compressor varies by vehicle application and engine RPM. See application list for details.

**2019+ model year trucks only

OPTIONAL ACCESSORIES

FILTER REGULATOR LUBRICATOR (FRL) - 70 CFM

A700151



REMOTE MUFFLER

A700224



AIR AFTERCOOLER - 70 CFM

A800070



10-GALLON AIR RECEIVER TANK

A300047



VMAC DEALER INFORMATION:

VMAC
AIR INNOVATED

T: 250-740-3200 | Toll Free: 1-877-912-6605 | Fax: 250-740-3201

E: sales@vmacair.com | www.VMACAIR.com

M200097