


PUR Hose Kits – with Series 310

A-A 59439 (former U.S. Standard MIL C 4109 1/4"), ISO 6150 B

BENELUX, FRANCE, NORTH AMERICA, NORWAY, SWITZERLAND

Technical Data






Size (IDxOD mm) 5x8, 6.5x10, 8x12, 11x16
Length..... From 2 to 20 m (from 6.5 to 65.5 ft)
Max. working pressure Spiral 10 bar (145 PSI), Straight 16 bar (232 PSI)
Hose..... Straight Braided or Spiral



 **This series includes safety products.**
 For other safety products, see Page 71-78.



Air Flow

— Hose 5x8 mm
 - - - - - Hose 6.5x10 mm
 - - - - - Hose 8x12 mm
 - - - - - Hose 11x16 mm

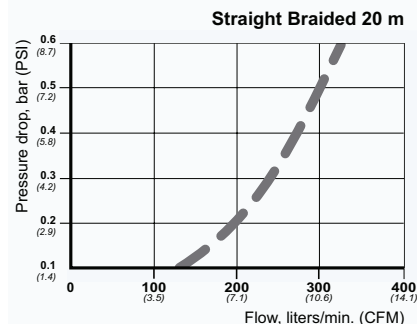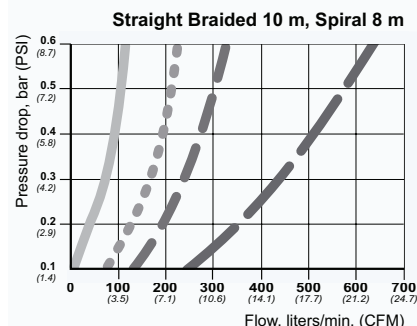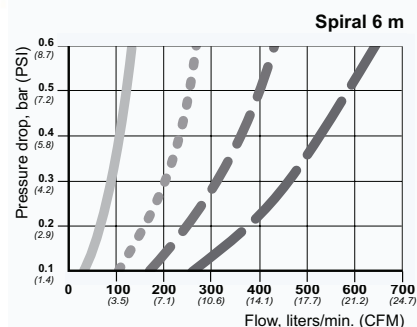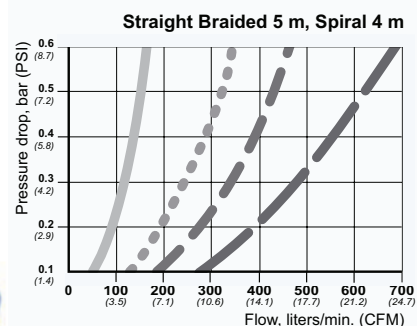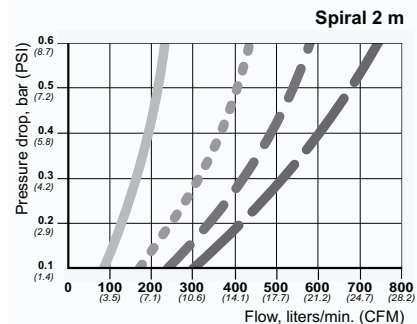

SERIES 310	Service Length	ID x OD (mm)	Standard	Vented Safety
	2 m	5 x 8	19 958 9923	-
		6.5 x 10	19 958 9927	-
		8 x 12	19 958 9931	-
		11 x 16	19 958 9935	-
	4 m	5 x 8	19 958 9924	-
		6.5 x 10	19 958 9928	-
		8 x 12	19 958 9932	19 958 9709
		11 x 16	19 958 9936	-
	6 m	5 x 8	19 958 9925	-
		6.5 x 10	19 958 9929	-
		8 x 12	19 958 9933	19 958 9710
		11 x 16	19 958 9937	-
8 m	5 x 8	19 958 9926	-	
	6.5 x 10	19 958 9930	-	
	8 x 12	19 958 9934	19 958 9711	
	11 x 16	19 958 9938	-	
	5 m	8 x 12	-	19 958 9700
	10 m	6.5 x 10	19 958 9600	-
		8 x 12	19 958 9832	19 958 9701
	15 m	8 x 12	19 958 9833	19 958 9702
20 m	8 x 12	19 958 9822	-	

Flow capacity is measured at 6 bar (87 PSI) inlet pressure, and pressure drop at 0.5 bar (7 PSI). Check with an authorized CEJN distributor for availability and prices.